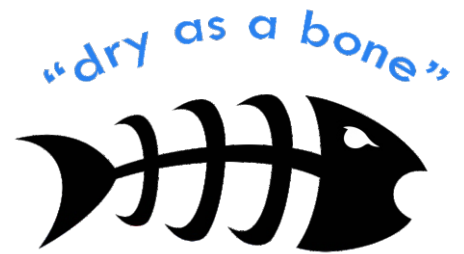

TECHNICAL INFORMATION

DECO BIO BLACKTOP

Asphalt Conditioner



DECO PRODUCTS, INC.

Product specification

DECO BIO BLACKTOP Conditioner is a proprietary blend of natural oils and co- polymers used as a safe and non- toxic alternative to asphalt and tar based materials. DECO BIO BLACKTOP Conditioner is designed for conditioning and sealing asphalt surfaces. DECO BIO BLACKTOP Conditioner penetrates into the substrate softening and conditioning the asphalt while adding excellent protection from chemical and UV rays.



Environmentally Friendly

Totally Water- Based

Non- Hazardous

B E N E F I T S

- Excellent adhesion
- Chemical and UV resistant
- Conditions and seals dried out old asphalt
- Environmentally friendly
- Dries fast, reduces scheduling problems
- Cleans up with soap and water
- Long term dependability
- Cost effective
- Non- hazardous Non- toxic Non- flammable

Use: For approved applicators

New & existing construction: Clean all dirt and oils and fill any cracks or potholes prior to application. Apply DECO BIO BLACKTOP Conditioner with a pump up sprayer, cordless backpack sprayer or 2.2 GPM spot sprayer. Spray with a fan or cone tip directly on to the asphalt driveway or parking lot until covered. work material in holes and small cracks. Overlap edges to ensure even an coat. When applying a second coat always apply in opposite direction from the first coat. Allow 4- 6 hours before walking on and 24- 48 hours before driving.

Distributed by:



Made in the U.S.A.



S P E C I F I C A T I O N D A T A

Preparation:

Repair all structural deficiencies such as cracks and potholes before applying DECO BIO BLACKTOP Conditioner.

Cover all areas or surfaces not to be sealed, such as concrete sidewalks or patios prior to applying. Seal or repair all cracks or deficiencies.

Application:

Apply DECO BIO BLACKTOP Conditioner, without dilution, with desired equipment. For spraying application, and depending upon sprayer equipment used, it is recommended that a cone or fan tip. Do not apply over 100 PSI. Apply DECO BIO BLACKTOP Conditioner until saturated. Do not interrupt application process until area is completely treated.

Equipment cleans up easily with soap and water.

WARRANTY: DECO BIO BLACKTOP Conditioner should last 3-5 years depending on installation and environment conditions. BIO BLACKTOP Conditioner is warranted as specified for a period of not less than one year from date of application. DECO Products, Inc. warrants its product to be good quality and will replace or refund the purchase price of any product proved defective. It is the responsibility of the buyer to determine that this product meets their needs and to apply it properly. The application of DECO BIO BLACKTOP Conditioner requires that the installer be skilled in achieving results from applying this product. Satisfactory results depend not only upon quality product, but also upon many factors beyond DECO Products, Inc.'s control. DECO Products, Inc. makes no warranty or guarantee, expressed or implied, including warranty of fitness or merchantability respecting its products. DECO Products, Inc. shall have no other liability with respect thereto. Guarantee of this product, DECO BIO BLACKTOP SEALER, when used according to directions, is limited to refund of purchase price or replacement of product, if it is proved defective. DECO Products, Inc. shall not be liable for cost of labor, direct or incidental consequential damages.

COVERAGE:

APPROXIMATELY 240 square feet per gallon

NOTE: Coverage rates may vary due to the porosity of the substrate.

TECHNICAL SERVICES:

Technical advice furnished by DECO Products, Inc., concerning any use or application of DECO BIO BLACKTOP Conditioner is reliable as current technology allows. DECO Products, Inc. makes no warranty, expressed or implied, of any use of application for which such advice is furnished. OTHER LOW VOC products for concrete, stucco, block and specialty cementitious items are available from DECO Products, Inc. Ask your representative for details.

COATING PERFORMANCE: 4 hour chemical resistance
Results 1-5 (5= Best results) Compared to standard asphalt sealer

	DECO COATING	COMMERCIAL SEALER
Motor oil 10W- 40-	4.5	4.0
Antifreeze-	5.0	5.0
Brake fluid-	4.5	0.0
Gasoline-	4.5	4.0
Water-	<u>4.5</u>	<u>4.5</u>
TOTAL SCORE	23	17.5

Additional comparisons

Hot tire pick up	None	None
30 day adhesion	Excellent	Good
30 day abrasion	Excellent	Excellent
Tack free dry time	75 min	85 min

LIMITATIONS:

Do not let product freeze. Store indoors at temperatures above 32 degrees Fahrenheit. The temperature must be 40 degrees Fahrenheit and rising before application.

Do not dilute DECO BIO BLACKTOP Conditioner. Do not apply DECO BIO BLACKTOP Conditioner when the threat of rain is imminent. Do not apply DECO BIO BLACKTOP Conditioner on concrete or painted finishes. DECO BIO BLACKTOP Conditioner will not plug holes or cracks. Use caution when applying on windy days.

KEEP OUT OF REACH OF CHILDREN

INSTALLATION:

NOTE: Always perform a test of DECO BIO BLACKTOP SEALER to ensure desired results. If results are not satisfactory call your local DECO representative for additional information.

Environmental responsibility

Since 1991 Deco Products has been manufacturing only non- hazardous and solvent free sealers and coatings for the concrete industry. We take pride in our communities and neighborhoods and want to preserve and protect our planet for generations to come.

Recommended equipment:



DECO 20 (Penetrating Concrete Sealer)

DECO Products, Inc.

7900 E. 40th Ave.

Denver, Colorado 80207

(800) 500-3326