



**DECO PRODUCTS, INC.**

# Ure-a-Cast 1K

## "High Shine"

**Modified Urethane, Single Component, High Shine**

### *Product specification*

DECO's Ure-a-Cast 1K is a single part modified Urethane sealer designed to protect, enhance and create a high shine on pavers, natural stone and other cementitious materials. Our Ure-a-Cast 1K is a highly durable coating that can protect against scratches and most common stains. Ure-a-Cast 1K will lock sand in pavers and reduce weed growth.

**Non- Hazardous**

**Totally Water- Based**

### **B E N E F I T S**

- Out performs most 2 part Urethanes
- High Shine/ Color Enhancing
- Locks sand
- No Pot Life/ Leftover material can be used on the next job
- Color pigments can be added for customized jobs
- Resistant to mildew growth/ UV protected
- Stain resistant/ Scratch resistant
- Non- toxic Non- hazardous Non- flammable
- Excellent adhesion to bare pavers, concrete, stamped concrete, natural and artificial stones

### *Use: For approved applicators*

Ure-a-Cast 1K is a self cross linking Urethane polymer that will give you 2k properties in an easier to use 1K system. No jobsite mixing of part A & B, no pot life and no time constraints. Easily applied with a low PSI sprayer, bucket sprayer or brush and roller. Easy to clean up and dry to the touch in just a few hours. Allow minimum of 72 hours before driving on finished job.



Made in the U.S.A.



# SPECIFICATION DATA

## PRODUCT BENEFITS

Excellent Chemical Resistance  
Hot Tire Resistance  
Excellent Adhesion  
Water Blushing Resistant  
UV Protected  
Shines Surfaces

## LIMITATIONS

Do not let product freeze. Do not dilute with water. Store indoors at temperatures above 32 degrees Fahrenheit. Do not apply product when temperatures are below 50 degrees Fahrenheit and above 95 degrees Fahrenheit. Surface temp not to exceed 100 degrees during application. Use caution when applying on windy days and do not install when rain is imminent. This product creates a film is not an anti slip material. For best results and safety an anti slip additive should be used.

## PREPARATION:

Use Deco's Super StripaCast if surface has been previously sealed. Clean substrate thoroughly with power washer removing all loose dirt, oils and foreign objects. Repair all cracked or damaged grout lines and deficiencies. Allow substrate plenty of time to dry to prevent trapping moisture behind the sealer and harming the products effectiveness.

**Environment Responsibility:** Ure-a-Cast 1K is manufactured with non solvent materials and uses only top quality materials in our formulas.


## KEEP OUT OF REACH OF CHILDREN

**Storage:** The average shelf life of Ure-a-Cast 1K is one year from manufacturing or 6 months after seal has been broken (which ever comes first) when stored in climate controlled conditions between 35 and 85 degrees and out of direct sunlight.

Made in the U.S.A.



**Distributed by:**

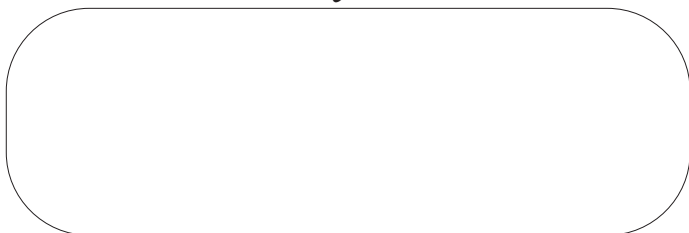

## TESTING

ASTM D3359 Adhesion  
ASTM C836 Adhesion Strength  
ASTM D2939 Resistance to Water  
ASTM E154 Resistance to Decay

## APPLICATION:

Apply Ure-a-Cast 1K without dilution to concrete pavers, unglazed tile, natural or artificial stone, or brick surfaces with a low pressure pneumatic canister or garden type hand pump sprayer. Use a fine mist and apply to substrate until wet, avoiding drips and runs. Allow a minimum of 24 hours before walking on and 72 hours before driving on. Times may vary due to weather, humidity and other conditions. **This material is a film forming sealer and a slip resistant additive is recommended to avoid slips and falls.**

## WARRANTY:

DECO Products, Inc. warrants its products to be of the highest quality and will replace or refund the purchase price of the product if proven defective within one year of date of purchase. It is the buyers responsibility to determine that the product meets their needs and should be applied by a skilled applicator. Always perform a jobsite test prior to complete application to ensure desired results.

## TECHNICAL SERVICES:

Applicators guides are available on our website or by contacting your local rep. Always read and understand Technical Data, Applicators Guides and SDS before using. Always do a small test spot to ensure desired results. Technical support is available by calling 800-500-3326. For best results it is recommended that a skilled applicator apply the Ure-a-Cast 1K. Technical advise furnished by DECO Products, Inc. concerning any use or application of its products is as reliable as current technology allows.

As a leading manufacturer of sealers, Deco Products is committed to providing customers with environmentally friendly products that meet the highest standards of quality available today.

## Recommended equipment:

