


TECHNICAL INFORMATION

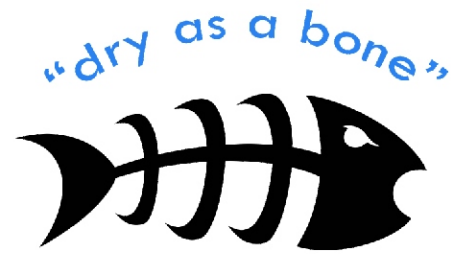

DECO Salt Shield 303

DECO PRODUCTS, INC.

Product specification

DECO Salt Shield 303 is a clear water based silane/ siloxane emulsion designed to reduce water and moisture intrusion while protecting the concrete surface from chlorides and deicing salts. DECO Salt Shield 303 penetrates deep in to the substrate protecting the integrity of the concrete. DECO Salt Shield 303 will not change the skid or slip resistance of the concrete and is ideal for sidewalks, driveways, parking structures, bridges, roadways and marine docks.



Environmentally Friendly

Totally Water- Based

Non- Hazardous

B E N E F I T S

- Seals and Protects concrete surfaces
- Protects against salts and deicers
- Helps reduce spalling of the concrete
- Dries Clear, No film or residue
- Penetrates deep into the concrete
- Reduces mildew growth
- Reduces concrete dusting
- Reduces freeze/ thaw damage
- Non hazardous Non toxic Non flammable

Use: For approved applicators

New & existing construction: Apply directly to concrete surfaces until saturated with a hand pump, 5 gallon pneumatic sprayer or an electric farm tank sprayer.

Environmental responsibility

Since 1991 Deco Products has been manufacturing only non- hazardous and solvent free sealers and coatings for the concrete industry. We take pride in communities and neighborhoods and want to preserve and protect our planet for generations to come.

Distributed by:



BUILT GREEN™

Made in the U.S.A.



S P E C I F I C A T I O N D A T A

Preparation:

Repair all structural deficiencies before applying DECO Salt Shield 303.

Cover all areas or surfaces not to be sealed, such as doors, windows and floors, prior to applying. Seal or repair all cracks or deficiencies.

Application:

Apply DECO Salt Shield 303, without dilution, with a hand-pump sprayer or airless sprayer. Reapply a second coat to surface before initial application cures. Avoid puddling or over application. For spraying application, and depending upon sprayer equipment used, it is recommended that an orifice size of 0.035 inches be used for testing to insure proper material application. Do not apply over 100 PSI. Apply DECO Salt Shield 303 until saturation. Do not interrupt application process until area is completely treated.

Equipment cleans up easily with soap and water.

WARRANTY: DECO Salt Shield 303 is warranted as specified for a period of not less than one year from date of application. DECO Products, Inc. warrants its product to be good quality and will replace or refund the purchase price of any product proved defective. It is the responsibility of the buyer to determine that this product meets their needs and to apply it properly. The application of DECO Salt Shield 303 requires that the installer be skilled in achieving results from applying this product. Satisfactory results depend not only upon quality product, but also upon many factors beyond DECO Products, Inc.'s control. DECO Products, Inc. makes no warranty or guarantee, expressed or implied, including warranty of fitness or merchantability respecting its products. DECO Products, Inc. shall have no other liability with respect thereto. Guarantee of this product, DECO Salt Shield 303, when used according to directions, is limited to refund of purchase price or replacement of product, if it is proved defective. DECO Products, Inc. shall not be liable for cost of labor, direct or incidental consequential damages.

COVERAGE:

On concrete approximately 375 Sq. Ft. Per gallon

On masonry block approximately 175 Sq. Ft. Per gallon

On Concrete Tiles and pavers approximately 375 Sq. Ft. Per gallon

NOTE: Coverage rates may vary due to the porosity of the substrate.

TECHNICAL SERVICES:

Technical advice furnished by DECO Products, Inc., concerning any use or application of DECO Salt Shield 303 is reliable as current technology allows. DECO Products, Inc. makes no warranty, expressed or implied, of any use of application for which such advice is furnished. OTHER LOW VOC products for concrete, stucco, block and specialty cementitious items are available from DECO Products, Inc. Ask your representative for details.

Distributed by:

LIMITATIONS:

DO NOT GET DECO SALT SHIELD 303 ON GLASS. DECO SALT SHIELD 303 WILL CAUSE ETCHING OF GLASS AND CANNOT BE REMOVED.

If DECO Salt Shield 303 comes in contact with glass, clean immediately with soap and water.

Do not apply to previously sealed or over any curing membrane. Avoid over application and do not allow product to puddle. Over applying could create a whitening on the surface.

Do not let product freeze. Store indoors at temperatures above 32 degrees Fahrenheit. The temperature must be 28 degrees Fahrenheit and rising before application.

Do not dilute DECO Salt Shield 303. Do not apply DECO Salt Shield 303 when the threat of rain is imminent or if it has rained in the last 8-12 hours. Surface should be dry. Do not apply DECO Salt Shield 303 on glazed tile, slate, glazed brick construction, acrylics or painted finishes. Do not use DECO Salt Shield 303 on colored concrete. DECO Salt Shield 303 will not plug holes or cracks. Cover all doors and glass openings to insure product does not come in contact with them. Use caution when applying on windy days. DECO Salt Shield 303 is not designed to be used as a waterproofing coating to stop moisture penetration caused by cracks or holes in the surface.

KEEP OUT OF REACH OF CHILDREN

INSTALLATION: On concrete substrates allow a minimum of 28 days before application.

NOTE: Always perform a test of DECO Salt Shield 303 to ensure desired results. After the sealer has dried on the substrate, apply water to see if sealer repels. If water repels, continue with the application of DECO Salt Shield 303. If water absorbs into substrate and does not repel water, do not continue the application of DECO Salt Shield 303. Call your local DECO representative for additional information.

For more detailed information please refer to our applicators guide or contact us with questions.



DECO Salt Shield 303

DECO Products, Inc.

7900 E. 40th Ave.

Denver, Colorado 80207

(800) 500-3326